


BXXXXLS-1W
1KV ISOLATION, 1W OUTPUT, UNREGULATED, SIP 7 PACKAGE, MTBF>1M HOURS
Available Inputs:
5, 12, 15 and 24 VDC
Available Outputs:
3.3, 5, 9, 12, 15, 18 and 24 VDC

Other specifications please enquire Sunyuan Technology.


Electrical Specifications

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

Input Specifications

Voltage range	+/- 10 %
Filter	Capacitors
Isolation Specifications	
Rated voltage	1000 VDC
Leakage current	1 mA
Resistance	10 ⁹ Ohm
Capacitance	60 pF type.

Output Specifications

Voltage accuracy	+/- 5 %, max.
Ripple and noise (at 20 MHz BW)	75 mV p-p, max.
Short circuit protection	Momentary
Line voltage regulation	+/- 1,2 % / 1,0 % of Vin
Load voltage regulation	+/- 8 %, load = 20 ~ 100 %
Temperature coefficient	+/- 0,02 % / °C

General Specifications

Efficiency	70 % to 85 %
Switching frequency	125 KHZ, type.

Environmental Specifications

Operating temperature (ambient)	- 40° C to + 85° C
Storage temperature	- 55 °C to + 125 °C
Derating	See graph
Humidity	Up to 90 %, non condensing
Cooling	Free air convection

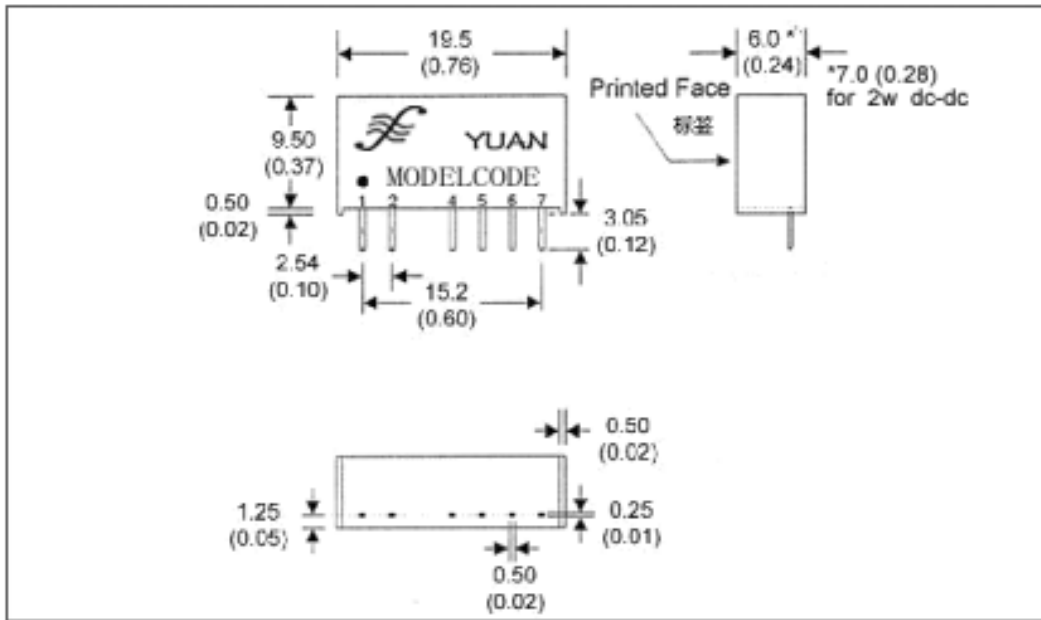
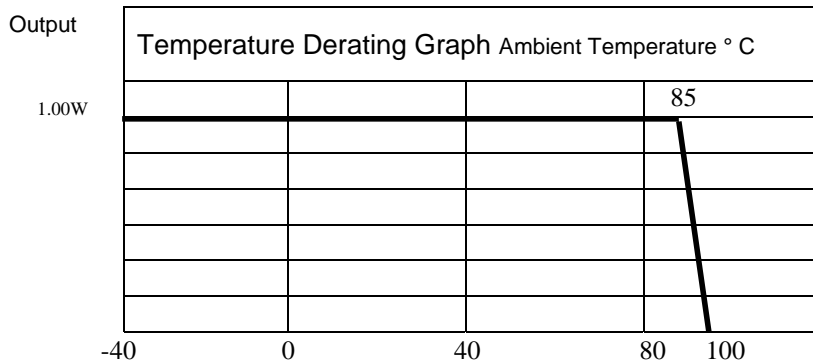
Physical Characteristics

Dimensions SIP	19,50 x 6,00 x 9,50 mm 0,76 x 0,24 x 0,37 inches
Weight	2 g, 3 g for the 48 VDC variants
Case material	Non conductive black plastic

Examples of Part Numbers

SUNYUAN PART NO	INPUT VOLTAGE (VDC)	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYPE.)
B0503LS-1W	5	14	363	3.3	303	72
B0505LS-1W	5	16	266	5	200	75
B0512LS-1W	5	18	254	12	84	70
B1205LS-1W	12	11	119	5	200	70
B1212LS-1W	12	10	104	12	84	80
B1215LS-1W	12	15	107	15	68	78
B2405LS-1W	24	5	55	5	200	75
B2412LS-1W	24	7	54	12	84	77
B2415LS-1W	24	8	55	15	76	76

BXXXXLS-1W
1KV ISOLATION, 1W OUTPUT, UNREGULATED, SIP 7 PACKAGE, MTBF>1M HOURS

Dimensions

Derating Graph and Pinning


Pin	Connection		
1	+	V _{in}	Input
2	-	V _{in}	Input
3			Omitted
4	-	V _{out}	Output
5			Omitted
6	+	V _{out}	Output
7			Omitted

- Specification may be changed without any notification.
- © Copyright 2004, Sunyuan Technology. All Right Reserved.
 TEL : 86-755-83100080 13903024062 FAX : 86-755-83116652
 Website: www.sun-yuan.com E-mail: sy@sun-yuan.com
 Website: www.sunyuan.com.cn E-mail: szsy@sunyuan.com.cn

