



**FRONTIER
ELECTRONICS CO., LTD.**

**GP20-005G
THRU
GP20-10G**


2A GENERAL PURPOSE GLASS PASSIVATED RECTIFIER

FEATURES

- LOW FORWARD VOLTAGE
- HIGH CURRENT CAPABILITY
- LOW LEAKAGE CURRENT
- HIGH SURGE CAPABILITY
- GLASS PASSIVATED CHIP JUNCTION

MECHANICAL DATA

- CASE : MOLDED PLASTIC USE UL 94V-0 RECOGNIZED FLAME RETARDANT EPOXY
- TERMINAL : AXIAL LEADS, SOLDERABLE PER MIL-STD-202 METHOD 208
- POLARITY : COLOR BAND DENOTES CATHODE
- MOUNTING POSITION : ANY
- WEIGHT : 0.4 GRAMS

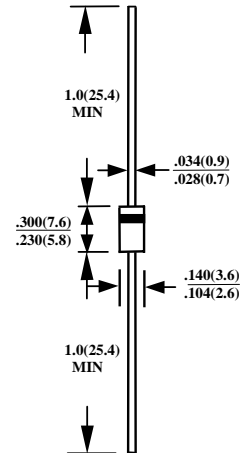

CASE : DO15
DIMENSIONS IN INCHES AND (MILLIMETERS)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS
RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED
SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD.
FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%

RATINGS	SYMBOL	GP20 -005G	GP20 -01G	GP20 -02G	GP20 -04G	GP20 -06G	GP20 -08G	GP20 -10G	UNITS
MAXIMUM RECURRENT PEAK REVERSE VOLTAGE	V_{RRM}	50	100	200	400	600	800	1000	V
MAXIMUM RMS VOLTAGE	V_{RMS}	35	70	140	280	420	560	700	V
MAXIMUM DC BLOCKING VOLTAGE	V_{DC}	50	100	200	400	600	800	1000	V
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT .375" (9.5mm) LEAD LENGTH AT TA=55°C	I_O	2.0							A
PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	I_{FSM}	70							A
TYPICAL JUNCTION CAPACITANCE (NOTE1)	C_J	25							PF
TYPICAL THERMAL RESISTANCE (NOTE 2)	$R_{\theta ja}$	40							°C/W
STORAGE TEMPERATURE RANGE	T_{STG}	-55 TO + 175							°C
OPERATING TEMPERATURE RANGE	T_{OP}	-55 TO + 175							°C

ELECTRICAL CHARACTERISTICS (At TA =25°C UNLESS OTHERWISE NOTED)

CHARACTERISTICS	SYMBOL	GP20 -005G	GP20 -01G	GP20 -02G	GP20 -04G	GP20 -06G	GP20 -08G	GP20 -10G	UNITS
MAXIMUM FORWARD VOLTAGE AT I_O DC	V_F	1.1							V
MAXIMUM REVERSE CURRENT AT 25°C	I_R	5							μA
MAXIMUM REVERSE CURRENT AT 100°C	I_R	50							μA

NOTE : 1. MEASURED AT 1MHZ AND APPLIED REVERSE VOLTAGE OF 4.0 VOLTS
2. BOTH LEADS ATTACHED TO HEATSINK 20x20x1t(mm) COPPER PLATE AT LEAD LENGTH 5mm

RATINGS AND CHARACTERISTIC CURVE GP20-005G THRU GP20-10G

FIG. 1- FORWARD CURRENT DERATING CURVE

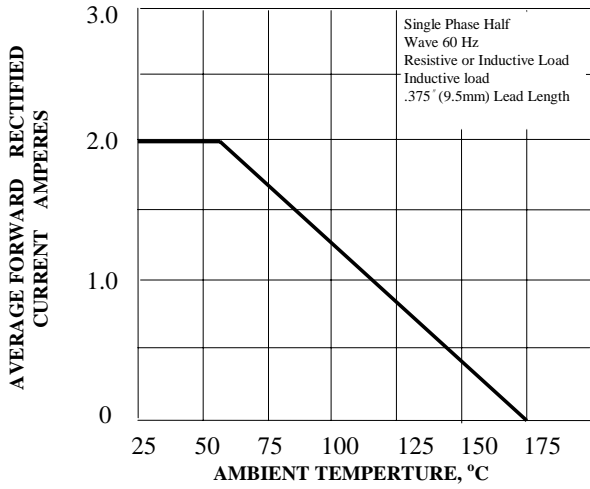


FIG. 2 -TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

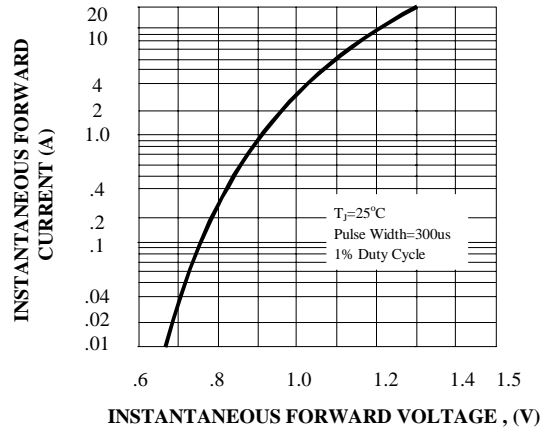


FIG. 3 -PEAK FORWARD SURGE CURRENT

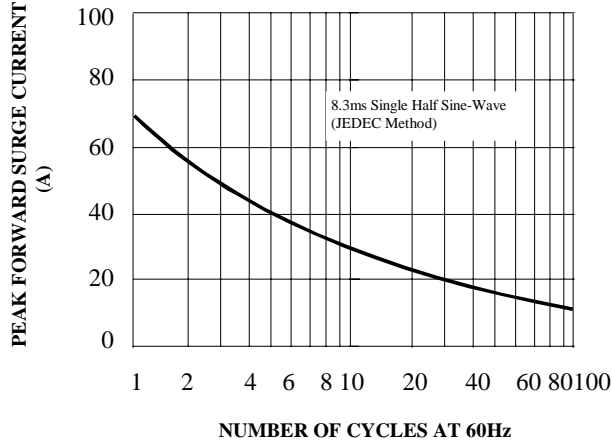


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

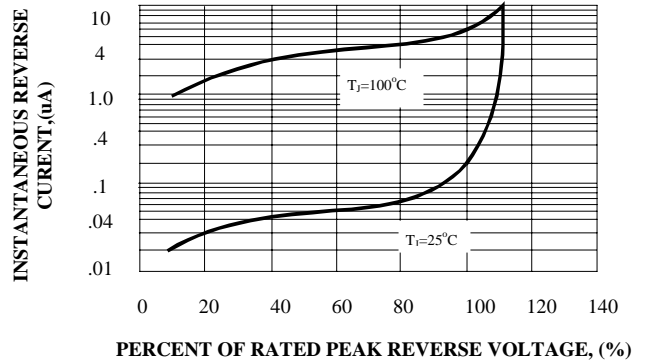


FIG. 5 -TYPICAL JUNCTION CAPACITANCE

